

Zirconia Sleeve

Shineoi wholesale fiber optic ferrules from China famous ferrule manufacturers, and based on Shineoi's machining capability, we can offer featured products.



- ◇ SC Standard Split Sleeve
- ◇ LC Standard Split Sleeve
- ◇ ST Standard Split Sleeve

Applications

Fiber Optic Mating Adaptor, Fiber Optic Attenuator, TOSA/ROSA receptacle

Features

- ◆ Accurate Mechanism, Precise Dimensions;
- ◆ High Mechanical Durability (>1000 times);
- ◆ Low Insertion Loss, <0.2dB (Typical <0.15dB);
- ◆ Superior concentricity and Cylindricity;
- ◆ Good flexibility and stable connection;
- ◆ Operation Temperature: -40°C ~ +85°C;
- ◆ Zirconia Material, RoHS compliant.



P/N: ZS-11S




P/N: ZS-22S



P/N: ZS-23S

Type	OD±0.01	ID	Length±0.05	Split Width ±0.1	Withdraw Force	Insertion Loss
LC	1.62	Ref. 1.240	6.80	0.2	1.0~3.0N	<0.2dB (Typical <0.15dB)
SC	3.20	Ref. 2.490	11.40	0.5	2.0~6.0N	
ST	3.20	Ref. 2.490	10.10	0.5	2.0~6.0N	

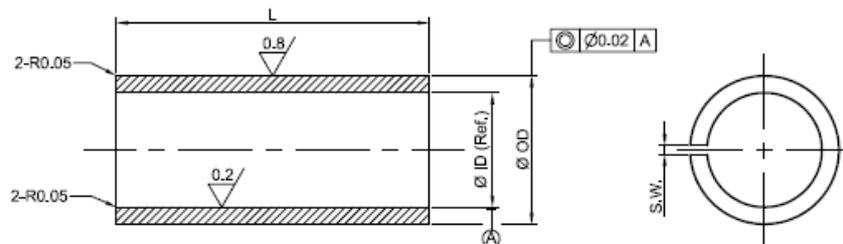

NOTE: Solid type and non-standard Sleeves can be supplied per customer requirement.